PROFESSIONAL MANUFACTURER OF
FOOD HEATING & MIXING MACHINES

食品加热搅拌设备专业制造商

隆迈
LONGMAI

诸城隆迈机械有限公司
ZHUCHENG LONGMAI MACHINERY CO., LTD

地址：山东省潍坊市诸城市舜王街道舜泰街 318 号
手机：18765172066
电话：0536-6316668
网站：www.longmaijixie.cn

Address: No. 318, Shuntai Street, Shunwang Sub-district,
Zhucheng City, Weifang City, Shandong Province, China
Mob./Whatsapp: +86 13665368729
Tel: 0536-6316668
Email: lucas@longmai-machinery.cn
Website: www.longmaimachinery.com

隆迈
机械

食品加热搅拌设备专业制造商

PROFESSIONAL MANUFACTURER OF
FOOD HEATING & MIXING MACHINES

诸城隆迈机械有限公司
ZHUCHENG LONGMAI MACHINERY CO., LTD



COMPANY PROFILE
公司简介

贸易 制造 研发 服务

诸城隆迈机械有限公司坐落在著名的恐龙之乡、舜帝故里—山东省诸城市，是一家致力于为全球用户提供食品加热搅拌解决方案的专业制造商，集研发设计、销售和服务于一体的综合服务型工厂。公司秉持高效、智能、环保、人性化的产品开发理念，以产品质量为根本，以专业专注的匠人精神，坚持以客户为中心，为客户创造价值，为员工创造机会，为社会创造效益。

公司主营产品：预制菜央厨加工设备、自动炒菜机、漂烫卤煮锅、夹层锅、行星搅拌炒锅、平底多爪炒锅、电磁炒锅、高压蒸煮锅、滚筒炒货机、卧式搅拌机、自动上料机、爆米花机、蜜饯浸糖锅等食品机械；目前拥有多台高精准光纤激光切割机、激光打标机、雕刻机、大型数控机床以及线切割等高精准加工装备；公司提供定制服务以实现每位客户的实际使用需求，把传统手工式加工变革为智能标准化生产。

公司自主研发取得多项产品专利认证、ISO9001质量管理体系认证、3A认证和欧盟CE认证等，产品远销东南亚、欧美和大洋洲等世界各地，过硬的产品质量和完善的售后服务为我们赢得了逐年持续发展的声誉和动力。







Zhucheng Longmai Machinery Co., Ltd, located in Zhucheng City, Shandong Province, a well-known city for dinosaur fossil and the ancient Shun Emperor, is a comprehensive factory for R & D designing, marketing, sales and services, devoted to providing first-class industrial food heating and mixing solutions for customers around the world. We adhere to concept of developing products with high efficiency, smart control, environmental protection and humanization. We have been sticking to putting customers' interest at first, aiming to benefit them with quality machines and satisfactory services, to create opportunities for employees, and to create value for the society.

We manufacture mainly ready-to-eat food processing machines for central kitchen, planetary cooking mixer, jacketed kettle, vacuum cooking kettle, high pressure cooking kettle, blanching machine, horizontal mixer, rotary type drum cooking kettle, popcorn machine, candied fruits processing machines…We have been introducing hi-tech manufacturing equipments including laser cutting machines, laser labeling machine, automatic carving machine and multi-purpose NC machines for precise and standardized fabrication, transforming traditional manufacturing into intelligent computer-aided manufacturing. We provide customization services to meet special requirements of different customers.

Our products are exported to many countries in Southeast Asia, Americas, Europe, Africa, Oceania, and other regions. Through years of research and development, we have obtained many patents, ISO9001 conformity certificates, 3A qualifications, as well as CE and TUV certificates. Durable quality of our machines and satisfactory sales services have earned us increasingly high reputation and further drive us forward continuously.

证书资质
QUALIFICATIONS & CERTIFICATES

公司自主研发取得多项产品专利认证、ISO9001质量管理体系认证、3A认证和欧盟CE认证等
R&D Patents, ISO9001 Conformity Certificates, 3A Qualifications, CE Certificates






























目录 CATALOGUE

01 大型多爪炒锅
LARGE CAPACITY DOUBLE-PLANETARY COOKING MIXER P07

02 电磁加热炒锅
ELECTROMAGNETIC INDUCTION COOKING MIXER P11

03 电导热油炒锅
ELECTRIC-THERMAL OIL HEATED COOKING MIXER P13

04 燃气加热炒锅
GAS HEATED COOKING MIXER P15

05 蒸汽加热炒锅
STEAM HEATED COOKING MIXER P17

06 卧式横轴搅拌机
HORIZONTAL COOKING MIXER P19

07 预制菜央厨设备
CENTRAL KITCHEN FOOD PROCESSING MACHINES P21

08 滚筒炒锅
ROTARY TYPE DRUM COOKING MACHINE P23

09 夹层锅
JACKETED KETTLE P25

10 卤煮锅/漂烫锅
BLANCHING MACHINE P27

11 高压蒸煮锅
HIGH PRESSURE COOKING KETTLE P29

12 自动上料机
REMOTE-CONTROL BIN LOADER P30

13 爆米花生产线
POPCORN MACHINES & PROCESSING LINE P31

14 坚果油炸机
NUTS PROCESSING MACHINES P35

15 粉料炒料机
POWDERED MATERIALS COOKING MIXER P37

16 糖纳豆设备
NATTO BEANS PROCESSING MACHINES P39

17 蜜饯真空浸糖锅
CANDIED FRUITS VACUUM CONCENTRATION POT P41

18 定制机型
CUSTOMIZED MACHINES P43

ELECTROMAGNETIC INDUCTION HEATED DOUBLE-PLANETARY COOKING MIXER

电磁多爪炒锅













工作原理 WORKING PRINCIPLE

电磁加热是一种利用电磁感应原理将电能转化成热能的加热方式;所有的热量集中在锅内，没有热量流失，效率更高，更加节能环保;双重测温:感应温度与锅内物料实际温度相结合，使控温更加精准。

Electromagnetic heating is a kind of clean energy heating that is transferred from electric energy with the aid of electric induction. All the thermal energy is accumulated in the pot without loss, high efficiency, energy saving and environmentally friendly. Dual seting of temperature control system with sensor at bottom of the pot and wireless temperature control device for monitoring and controlling real-time temperature of the cooked materials, making temperature control more accurate.

适用范围 SCOPE OF APPLICATION

1、火锅底料的炒制以及熬油。
2、酱料以及调味料的炒制。
3、面粉类各种粉末物料的混合搅拌炒制。
4、高粘度物料的混合炒制工作(例如牛轧糖,麦芽糖，馅料等)。
5、中药材的炒制。
6、餐饮业炒菜炒饭用。

1.Cooking hot pot liquid sauce and oil.
2.Cooking all kinds of sauces and seasonings.
3.Cooking and mixing powdered materials like flour.
4.Cooking and mixing thick and sticky materials, such as nougat, malt sugar, fillings, etc.
5.Cooking Chinese medicine.
6.Cooking food and vegetables for catering .

技术参数 TECHNICAL DATA


锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharging Type	加热功率 Heating Power	外形尺寸 Overall Dimensions
350L~500L	1200mm	2.2kw/3.7kw	0~33rpm	双行星 / 刮底 / 六爪 Double-planetary/ Bottom scraping/7 scrapers	自动液压 Automatically hydraulic	40-60kw	2250*1950*1800
650L~800L	1400mm	2.2kw/3.7kw	0~33rpm	双行星 / 刮底 / 六爪 Double-planetary/ Bottom scraping/7 scrapers	自动液压 Automatically hydraulic	60-100kw	2500*2150*1800

GAS HEATED DOUBLE-PLANETARY COOKING MIXER

燃气多爪酱料炒锅





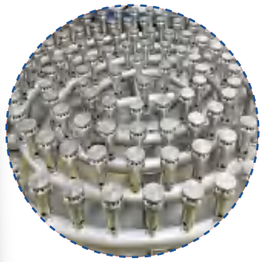









产品特点 MACHINE FEATURES

12mm不锈钢锅胆:一次冲压锅胆采用日本宜兴北海封头;
仿人工翻炒:双组行星搅拌装置由隆迈机械自身设计打造;
高标准切割件:所有板材及管材均由激光切割机标准切割;
设备精度高、刚性好,运行平稳。
静音减速机:万鑫精工齿轮电机免维护
密封机头:防止进入水汽,减缓保养次数;
专利设计:实用新型专利人性化构造设计;

-12mm thick stainless steel 304 cooking pot, seamlessly cold stamped with Japanese technology;
-Professional gear type motor reducer, silent mode, no need maintenance
-Simulation of human stirring, double planetary mixing of our own design
-Sealed mixing head, to prevent vapor from entering inside for rusting
-High accuracy of parts, pipes and plates prepared by laser machines
-Designing with patents, new model, practical and economical for customers' various needs
-High precision, quality stainless steel, steady operation

部分客户案例 SOME CUSTOMER CASES

上海莫小仙食品股份有限公司
贵州百凤庭食品有限公司
贵州省贵三红食品有限公司
湖州恒满食品配送有限公司
江苏康普(苏州)食品有限公司
品源(随州)现代农业发展有限公司
统之幸食品(江苏)有限公司
小洋人生物乳业集团有限公司
大连喜家德餐饮服务有限公司
黑龙江全味生物科技有限公司
湖北大自然农业实业有限公司
湖南长沙聚名湘食品科技有限公司
重庆秦汉唐食品有限公司
上海甘棠明善食品有限公司
许昌市胖东来实业有限公司
山东巧媳妇食品集团有限公司
山东佳诚食品有限公司
山东鸿兴源食品有限公司
山东鼎味食品有限公司
山东鑫旺调味食品有限公司
山东鼎福食品有限公司
山东龙盛食品股份有限公司
山东聚仁食品有限公司
乐陵市腾达辣椒制品有限公司
江苏和府餐饮管理有限公司
江苏洪宁食品有限公司
吉林延边三名园食品加工有限公司
龙海盛记食品工业有限公司

技术参数 TECHNICAL DATA


锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharging Type	加热方式 Heating Source	外形尺寸 Overall Dimensions
350L-500L	1200mm	2.2kw/3.7kw	0~33rpm	双行星 / 刮底 / 六爪 Double-planetary/ Bottom scraping/6-scraper	自动液压 Automatically hydraulic	天然气 / 液化气 NG/LPG	2350*2050*1800
650L-800L	1400mm	2.2kw/3.7kw	0~33rpm	双行星 / 刮底 / 六爪 Double-planetary/ Bottom scraping/6-scraper	自动液压 Automatically hydraulic	天然气 / 液化气 NG/LPG	2600*2200*2000


ELECTROMAGNETIC INDUCTION COOKING MIXER

电磁加热炒锅





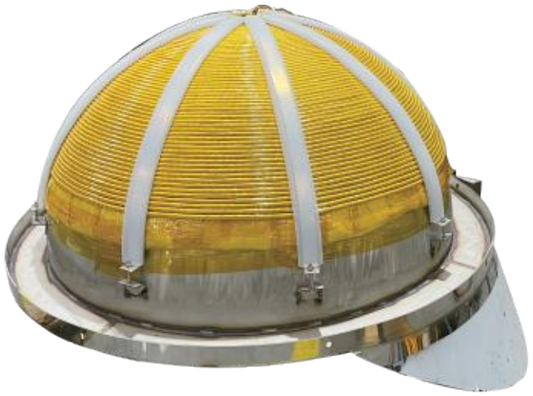

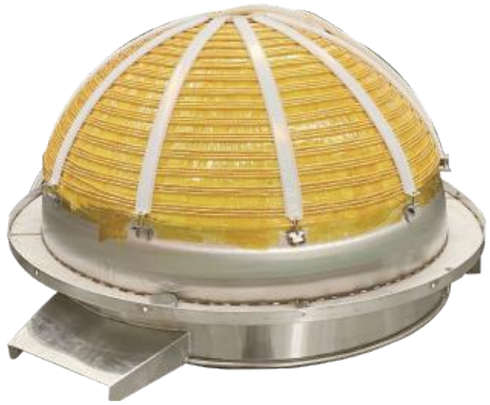







产品特点 MACHINE FEATURES

隆迈电磁搅拌锅采用纯304不锈钢内胆加热，感应精准，可支持24h连续生产，安全可靠。机芯加热部分采用德国英飞凌专业技术,值得信赖。本身静音设计，工作环境不带震动，按8-10年的使用要求设计制造，有些产品更是按20年的使用要求设计制造，稳定耐用。

Heating unit of electromagnetic cooking mixer is from German technology with accurate induction, safe and reliable, specialized with liquid cooling. Cooking pot is seamless, made of pure stainless steel 304. It is silent mode with stability, durable to work continuously 24/7. Some are designed and manufactured for long life upto 20 years.

适用范围 SCOPE OF APPLICATION

营养餐、酱料、馅料、底料、粉末、中药材等等多种物料的炒制。

It is applicable for catering meals, sauces, fillings, substrates, powders, Chinese herbal medicines, etc.

工作原理 WORKING PRINCIPLE

电磁加热的原理是通过高速变化的高频高压电流流过线圈会产生交变磁场，遇到炒锅金属锅体时产生交变的电流(即涡流),涡流使容器底部的载流子高速无规则运动，载流子互相碰撞、摩擦而产生热能。

The principle of electromagnetic heating is that high frequency and high voltage current flowing through the coil at a high speed to generate an alternating magnetic field becomes alternating current when it encounters with the metal pot, where charge carriers move irregularly at a high speed to produce heat while they collide and frict with each other.

设备优势

隆迈纯304不锈钢电磁加热，隆迈核心盘线盘技术，支持24小时连续加热，密封水冷机芯，可防止腐蚀性空气或物质腐蚀机芯及其电器元件,保证机芯的稳定加热。

Induction heating to pure stainless 304 pot, instead of composite pot of carbon steel and stainless, with stable electric ampere to support non-stop heating. Waterproof copper induction wire is coiled by ourselves in different ways to match with different cooking purposes. Sealed type induction unit with chiller can prevent corrosive air or matters from getting inside and thus avoid damages to electric units, and ensure its stability.

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharging Type	加热功率 Heating Power	外形尺寸 Overall Dimensions
50L-600L	500-1200mm	1.5kw 2.2kw 3.7kw	0~33rpm	行星 / 刮底 / 刮边 Planetary/Bottom scraping /Wall scraping	自动液压 Automatically hydraulic	10-60kw	2020*1700*1800 (以 1 米标配为例) (For 1000mm dia)

ELECTRIC-THERMAL OIL HEATED COOKING MIXER

电导热油炒锅















产品特点 MACHINE FEATURES

隆迈电导热油加热炒锅油温升上来后降温很慢，适合连续作业，可有效降低生产成本。锅胆整体受热均匀，适合炒制粘度高的物料。自动搅拌方式是模拟人工翻炒的手法，可以将物料充分翻炒融合均匀。

Special feature of this model is that the temperature drops slowy when it reaches the desired heating level, economical for continuous production. The pot is heated uniformly by thermal oil in the jacket, suitable for cooking sticky and thick materials. Automatic stirring is simulation of human blending to ensure its thorough mixing while cooking.

工作原理 WORKING PRINCIPLE

隆迈牌电加热行星搅拌炒锅以导热油为介质,连接电源通电,通过电热管加热导热油产生热量。

Thermal oil working as medium conducts heat to the pot. Heating tubes provide heat to thermal oil after they are connected with electricity supply.

适用范围 SCOPE OF APPLICATION

本机适用于炒制粘度高的物料，比如豆沙、莲蓉、阿胶、果酱、枣泥以及炒面粉等物料。


Applicable for cooking sticky and thick materials, such as beans paste, lotus seed paste, dates paste, gelatin, fruit jam, glutinous dough, etc.

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharging Type	加热功率 Heating Power	外形尺寸 Overall Dimensions
50L-600L	500-1200mm	1.5kw 2.2kw 3kw	0~33rpm	行星 / 刮底 / 刮边 Planetary/Bottom scraping /Wall scraping	自动液压 Automatically hydraulic	12-48kw	1900*1400*1780 (以 1 米标配为例) (For 1000mm dia)

GAS HEATED COOKING MIXER

燃气加热炒锅

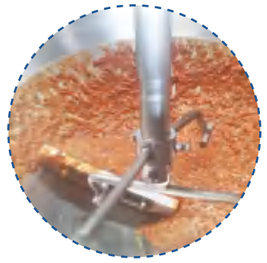













产品结构 MACHINE FEATURES

隆迈燃气加热炒锅主要由锅体、架体、搅拌系统、加热系统、调速传动装置、搅拌轴、锅体翻转系统等组成，搅拌方式技术领先：采用特殊的倾斜式传动，使用的行星式搅拌器与锅体充分接触，搅拌系统采用自转公转相结合的方式，保证锅内无任何搅拌盲点。

The cooking mixer is mainly composed of pot, frame, mixing system, heating system, transmission system and hydraulic system. We have introduced the leading mixing style and special inclined transmission, enabling scrapers to have full contact with the pot. The combination mixing style of rotation and revolution ensures no missing point while mixing.

产品特点 MACHINE FEATURES

隆迈燃气炒锅的特点在于明火爆香，火焰大小可调;升温快，温度高，行星搅拌装置翻炒均匀，提效率的同时还降低了生产成本;使用门槛低，占地面积小，使用寿命长，结构紧凑，维修方便，是性能优良的搅拌机。

It is characterized by adjustable flame that can reach high temperature within short time and enable materials with pleasant taste and smell. Its planetary stirring devices ensure thorough mixing efficiently while decreasing production cost for customers. It is widely used for its compact size, easy maintenance and satisfactory performance.

适用范围 SCOPE OF APPLICATION

本机适用于餐饮、食品加工、烘焙、调味品、休闲食品等领域。

This machine is suitable for catering, food processing, baking, seasoning, snacks, etc.

加热方式 HEATING SOURCE

液化气、天然气、醇基、生物燃油、柴油等，定设备前请于我们确定好加热方式。

Heating source is optional for LPG, NG, alcohol based fuel, bio fuel, diesel, etc..

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharging Type	加热方式 Heating Source	外形尺寸 Overall Dimensions
100L-600L	700-1200mm	1.5kw 2.2kw 3.7kw	0~33rpm	行星 / 刮底 / 刮边 Planetary/Bottom scraping /Wall scraping	自动/手动 Automatic/Manual	燃气/醇基/柴油 Gas/Alcohol/Diesel	1860*1450*1800 (以 1 米标配为例) (For 1000mm dia)

STEAM HEATED COOKING MIXER

蒸汽加热炒锅















产品特点 MACHINE FEATURES

隆迈蒸汽炒锅又名蒸汽锅、蒸煮锅、夹层蒸汽锅,以一定压力的蒸汽为热源，夹层锅具有受热面积大、热效率高、加热均匀、液料沸腾时间短、加热温度容易控制等特点;夹层锅锅内层锅体采用耐酸耐热的奥氏型不锈钢制造，配有压力表和安全阀，外型美观、安装容易、操作方便、安全可靠。

Heating source is steam with a certain pressure. It provides uniform heating with large heating area, high heating eficiency, short-time boiling for liquid materials, easy control of heating temperature. The pot is forged seamlessly with anti corrosion and anti high temperature stainless 304, equipped with full set of accessories including pressure gauge and safety relief vavle. Its useful design, instant installation, easy operation and safe running have earned for us many returned customers around the world.

适用范围 SCOPE OF APPLICATION

广泛应用于糖果、制药、乳品、糕点、馅料、饮料、罐头、调味品、卤味等食品的加工。

It is widely used for processing candy, medicine, diary, confectionery, fillings, canned fruits, seasonings, flavored foods, etc.

工作原理 WORKING PRINCIPLE

隆迈牌蒸汽行星搅拌炒锅主要由锅体和搅拌以及架体组成;锅体是由内外球形锅体组成的双层架构形式,中间夹层通入蒸汽加热。

It is mainly composed of cooking pot, mixing devices and frame. The pot is double layer jacketed with heating steam injected therein.

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	起臂形式 Arm Type	出料形式 Discharging Type	使用压力 Service pressure	外形尺寸 Overall Dimensions
50L-600L	500-1200mm	1.5kw 2.2kw 3.7kw	0~33rpm	行星 / 刮底 / 刮边 Planetary/Bottom scraping /Wall scraping	固定 / 升降 / 后翻 Fixed/Vertical/Back-tilting	手摇 / 自动 Manual/Automatic	0.3-0.8MPa	1850*1450*1750 (以 1 米标配为例) (For 1000mm dia)

HORIZONTAL COOKING MIXER

卧式横轴搅拌机











产品特点 MACHINE FEATURES

隆迈卧式搅拌机适用于高粘度物料的预煮、配制、浓缩、蜜饯;槽形锅体内部可抽真空。加热方式有:夹套加热(蒸气)、电磁加热、电导热油加热等。蜗轮减速机传动横轴搅拌,聚四氟乙烯桨刮边翻炒,设备操作简单方便,广泛应用于多种物料(如豆馅、果酱、奶油、汤类)的搅拌加热,果蔬制品的浓缩等。

It is applicable for precooking, blending and sugar infitrating of sticky materials. Materials in the pot are processed under vacuum condition. It can be heated by jacketed steam heating, electromagnetic induction heating, themal oil heating. Mixing shaft is driven by motor reducer with variable mixing speed. Teflon scrapers rotate tightly against the inner pot surface. It is operated easily and widely used for blending and heating of mutiple materials like beans paste, fruit jam, diary products, soups, etc. and infitration of fruits and vegetables.

适用范围 SCOPE OF APPLICATION

蜜饯:果脯、果干、罐头、梅子等

浓缩:果酱、果浆、番茄酱等

搅拌:咸菜、拌菜、调理类食品等

混合:对块状、粒状、粉状、泥状、糊状、浆状物等均适合

Infiltration: infiltrated fruits, dried fruits, canned fruits
Concentration: fruit jam, fruit syrup, tomato paste
Mixing: pickles, vegetables, herbs,seasonings
Blending: for materials in different forms-grounded, powdered, sliced , mashed

真空泵原理 VACUUM PUMP

真空泵系统由高速水泵、喷射器和水循环箱组成;循环水真空泵串联大气喷射器,加快真空度。水环除起“液体活塞”作用.还有散热(对缩压过程).密封(叶轮与配气板之间)冷却(轴封件)等作用。

Vacuum pump is composed of high speed motor, jet, vacuum tank and water circulation container. Motor paddles runs in a high speed and take away the air while pumping the water, and thus generate vacuum condition and keep the pressure in the vacuum tank, which will provide the vacuum even without actuating the vacuum motor frequently.

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharge	加热方式 Discharging Type	功能形式 Functions	外形尺寸 Overall Dimensions
300L	3kw-7.5kw	0-80r/min	卧式搅拌 Horizontal stirring	自动液压 Automatically hydraulic	蒸汽 / 电磁 Steam/Electromagnetic	搅拌 / 加热 / 抽真空 Stirring/Heating/vacuum Concentration	2500*1250*1550
500L	3kw-7.5kw	0-80r/min	卧式搅拌 Horizontal stirring	自动液压 Automatically hydraulic	蒸汽 / 电磁 Steam/Electromagnetic	搅拌 / 加热 / 抽真空 Stirring/Heating/vacuum Concentration	2700*1250*1600
800L	5kw-7.5kw	0-80r/min	卧式搅拌 Horizontal stirring	自动液压 Automatically hydraulic	蒸汽 / 电磁 Steam/Electromagnetic	搅拌 / 加热 / 抽真空 Stirring/Heating/vacuum Concentration	2850*1250*1650

CENTRAL KITCHEN FOOD PROCESSING MACHINES

预制菜央厨设备



自动炒菜机 Automatic Food Cooking Mixer





滚筒炒锅 Rotary Type Drum Cooking Machine



高压蒸煮锅 High Pressure Cooking Kettle



燃气铁炒锅 Iron Pot Cooking Kettle



卤煮漂烫锅 Blanching Machine



夹层锅 Jacketed Kettle



自动上料机 Automatic Bin Loader

ROTARY TYPE DRUM COOKING MACHINE

滚筒炒锅

















产品优势 PRODUCT ADVANTAGES

采用电磁加热，德国英飞凌专业技术，采用高频耐高温纯铜线圈，经久耐用，操作方便，筒体和物料直接接触避免热传导损失所以热效率更高、更节能，运行费用低；成熟变频技术，能效更高，反应速度更快，智能精准控制，在烘炒作业中温度控制精度可达±2%，保证烘炒品每锅品质相同，色泽一致，对操作人员技能要求低，可降低招工要求标准;触摸屏控制操作简单易懂，转速变频可调;整机SUS304不锈钢材质，用料足，内筒体用料厚，焊口无缝结合，做工精致，结构紧凑，占地面积小，打磨处理光滑明亮。

It is with electromagnetic induction heating from German Infineon technology. Induction coil is made of high frequency temperature resistant pure copper wire. It is with durable quality and easy operation. Direct contact of cooked materials with pot surface prevents loss of heating energy and thus more efficient. Its mature variable frequency technology helps to respond rapidly with smart control system. During the cooking process, temperature allowance ±2% ensures uniform quality of cooked materials. It does not require high performance of the operator with easier setup of touch screen. Machine adopts steel grade stainless 304, recognized for food materials. Welding joint is properly treated for finishing. It is fabricated by workers with skillful handcraft, covering small area with compact size.

适用范围 SCOPE OF APPLICATION

餐饮业炒菜炒饭，配餐中心，中央厨房配餐区，学校企业单位医院食堂等。

Stir frying for vegetables in food industry, catering, central kitchen for schools, enterprises, factories, hospitals, etc.

产品特点 MACHINE FEATURES

该产品主要内筒体、外筒体、架体、加热装置、控制箱等组成该设备采用滚筒旋转加热的方式，使物料在滚筒内受热均匀、无死角，功率可分档可调，量大，不粘锅，高效节能，可控温测温，设计合理，温度误差小，特质保温材料与筒体无缝结合，保温性能强，智能精准控制，炒制产品质量均一稳定，运行安全可靠，节能环保等优点。

It is composed of inner pot, outer pot, frame, heating structure, control panel and others, with constant heat through rotation. Cooked materials are uniformly heated without blind spot, and none sticky to the pot surface. It is designed with different heating power levels for energy efficiency , and with precise infrared temperature control device. Special heat insulation material is properly fixed with cooking pot to prevent heat loss. With smart control, materials are cooked uniformly with safe operation and environment protection.

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	直径 Pot Diameter	搅拌速度 Stirring Speed	加热方式 Heating Source	功率 Power	出料形式 Discharging Type	外形尺寸 Overall Dimensions
200L-650L	600-900mm	变频调速 Adjustable via VFD	燃气 /电磁 Gas/Induction	2kw-60kw	自动/手动 Automatic/Manual	2100*1400*1725 以400L为例 (for 400L)

JACKETED KETTLE

夹层锅



电磁全自动夹层锅 Induction heating automatic type



燃气全自动夹层锅 Gas heating automatic type



电导热油夹层锅 Electric thermal-oil heating manual type



立式蒸汽夹层锅 Steam heating bottom discharge type





电磁搅拌夹层锅 Induction jacketed kettle with mixer



夹层锅搅拌 Customized mixer for jacketed kettle



过桥式搅拌夹层锅 Thermal-oil jacketed kettle with mixer



立式蒸汽搅拌夹层锅 Steam jacketed kettle with mixer



人字形蒸汽搅拌夹层锅 Steam jacketed kettle with mixer



燃气搅拌夹层锅 Gas jacketed kettle with mixer

BLANCHING MACHINE


卤煮锅/漂烫锅









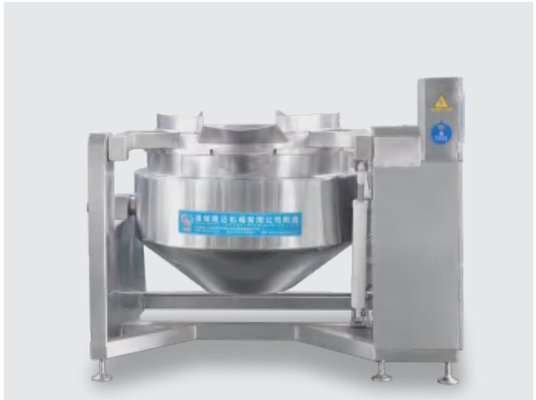

蒸汽卤煮锅 Steam heating type



电导热油卤煮锅 Electric thermal-oil heating type



电磁搅拌卤煮锅 Induction heating type with mixer



方形蜂窝卤煮锅 Steam heating square type



立式卤煮锅 Fixed type w/ bottom discharge



全自动漂烫锅 Fully automatic type

HIGH PRESSURE COOKING KETTLE

高压锅系列











REMOTE-CONTROL BIN LOADER

自动上料机











INTELLIGENT POPCORN MACHINE

智能爆米花机



产品特点 MACHINE FEATURES

隆迈大型球形爆米花机是依据客户和市场要求在专业传统式爆米花机的基础上，经过隆迈团队悉心研究，优良了搅拌裹糖系统，改善了加热炉膛环境，使爆米花机可在短时间之内升温，从而得出优质的球形爆米花。目前有两种加热方式:液化气、电磁。

Longmai brand industrial popcorn machines are researched and developed based on our planetary cooking mixers by providing flavor coating or seasoning automatically. It can reach high temperature rapidly to make sure popcorns are produced with perfect mushroom shape. Popcorn machines are optional with heating of gas or electric induction.

技术参数 TECHNICAL DATA

类型 Model	加热方式 Heating Source	直径 Pot Diameter	电机功率 Power	搅拌速度 Stirring Speed	出料形式 Discharging Type	控制方式 Control mode	生产能力 Capacity	外形尺寸 Overall Dimensions
燃气 Gas	液化气 Gas	700mm	3kw	0~88RPM	自动液压 Automatically hydraulic	按钮 Buttons	约 60kg/h	1207*1500*1500
电磁 Electromagnetic	电 Electric	700mm	23kw	0~88RPM	自动液压 Automatically hydraulic	按钮 / 智能 Buttons/PLC	约 85kg/h	1565*1373*1606
智能 Intelligent	电 Electric	900mm	43.7kw	0~88RPM	自动液压 Automatically hydraulic	按钮 / 智能 / 自动上料 Buttons/PLC/Unmanned	约 130kg/h	1541*1851*1675

隆迈 LONGMAI

燃气爆米花机

GAS POPCORN MACHINE







电磁爆米花机

ELECTROMAGNETIC POPCORN MACHINE









POPCORN PRODUCTION LINE

爆米花流水线





第五阶段 二级打散 Phase 5: Secondary detaching



第三阶段 初级打散 Phase3: Primary detaching

第六阶段 筛选 Phase 6: Sifting



第四阶段 冷却 Phase 4: Cooling



第二阶段 传送 Phase 2: Conveying



第一阶段 出料 Phase 1: Popping corns

NUTS PROCESSING MACHINES

坚果油炸机



自动挂糖机
AUTOMATIC SUGAR COATING MACHINE








自动油炸机
AUTOMATIC FRYING MACHINE



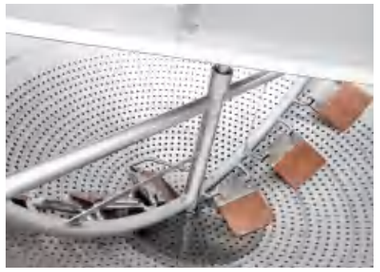



挂糖油炸一体机
SUGAR COATING & FRYING 2 IN 1








滤油回油车
OIL FILTERING CART







八角拌料桶
DRUM MIXER

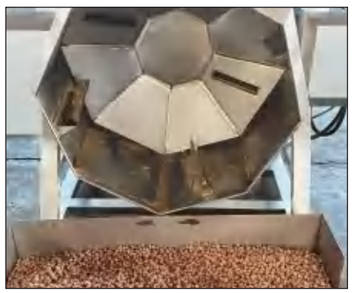





POWDERED MATERIALS COOKING MIXER

粉料炒料机















产品特点 MACHINE FEATURES

隆迈炒面粉机采用的是仿人工翻炒的搅拌方式，炒制时间短，速度快，效率高，产量大;不同于滚筒式炒面粉机，有效解决了其清洗难、出入料不方便、粉尘大、易糊锅的问题,炒制出的食品色泽金红亮丽，香气扑鼻。

It simuates hurman blending to ensure thorough mixing, cooking ready efficiently within short time. Comparing with traditional tumbler powder cooking machine, it is easy for cleaning, very convenient for materials feeding and discharging, dust proofing, and without over burnt. The cooked flour shows nice color with pleasant smell.

适用范围 SCOPE OF APPLICATION

隆迈粉末类炒锅可采用电磁、电导热油、燃气、蒸汽等加热方式，适用于食品粉末、调味粉、药品粉剂、化工用品等物料的混合炒制。密封罩连接风机，可有效吸走粉尘、烟雾，从而改善工作环境。

Powdered materials cooking machine can be heated by electromagnetic induction, electric-thermal oil, gas or steam, applicable for blending and dry cooking of flour powder, seasoning powder, medicine powder, chemical powder, etc. Protective cap is connected with exhaust fan to suck outside the excess powder and vapor to provide better working environment.

技术参数 TECHNICAL DATA


锅体容积 Loading Capacity	锅体直径 Pot Diameter	电机功率 Motor Power	搅拌速度 Stirring Speed	搅拌形式 Stirring Type	出料形式 Discharging Type	加热方式 Heating Source	外形尺寸 Overall Dimensions
100L-600L	700-1200mm	1.5kw/2.2kw	0-33r/min	行星 / 刮底 / 刮边 Planetary/Bottom scraping /Wall scraping	自动液压 Automatically hydraulic	电磁/燃气/导热油/蒸汽 Electric/Gas/Thermal-oil/Steam	2020*1700*1800 (以 1 米标配为例) (For 1000mm dia)

NATTO BEANS PROCESSING MACHINES

糖纳豆设备











糖纳豆煮锅 Natto beans cooking pot



配套笼屉 Specially designed stainless basket



洗豆机 Beans washing machine



客户现场 Customer's site

产品特点 MACHINE FEATURES

隆迈红小豆真空浸糖锅以蒸汽为热源，利用真空压力的变化对小豆进行糖液渗透，从而缩短小豆吃糖的时间，提高工作效率。由于整个浸渍过程是在密封状态下进行，时间缩短，产品营养成份的损失少，不发生氧化，保持了小豆原有的色泽与风味,透明度高。

The vacuum pot is heated by steam, wherein sugar syrup is infiltrated into beans within short time under vacuum pressure. The processing of infiltration is done in sealed space without oxidation, which reduces loss of nutrition and maintains original color and appearance with pleasant taste.

技术参数 TECHNICAL DATA

锅体直径 Pot Diameter	加热方式 Heating Source	使用压力 Working Pressure	真空度 Vacuum Pressure	开盖形式 Opening Type	出料形式 Discharging Type	外形尺寸 Overall Dimensions
900mm	蒸汽 steam	0.35mpa	0~-0.09mpa	自动气缸开盖 Pneumatic	行吊 Electric hoist	1550*1050*2350

CANDIED FRUITS VACUUM CONCENTRATION POT

蜜饯真空浸糖锅







电加热浸糖锅 Electric thermal-oil heating type



蒸汽半自动浸糖锅 Steam heating type manual tilting



高压负压两用锅 High pressure/vacuum presure dual type



水循环真空泵 Water circulation vacuum pump

产品特点 MACHINE FEATURES

传统浸糖采用多次煮制再多次浸泡的方法，完成浸糖需三四天，期间又不停的搅动果品，卫生条件极差,而且废品率高。利用隆迈真空浸糖锅所得产品色泽鲜、果味浓、不结晶、不倒糖、渗糖多、块形大、出品率高,是取代传统浸糖工艺的理想设备;同时该设备可适用于多种果脯产品的加工，通用性极强。

With traditional way, it will take 3 or 4 days to complete infitration, during which fruits will be heated and soaked again and again with continuous stiring, but still having high ratio of defective products. With our newly designed concentration pot, customers can get more quality products with big pieces, fresh color, nice fruit smell，well infiltrated, without crystallization. The concentration pot is universal for processing many kinds of candied fruits.

技术参数 TECHNICAL DATA

锅体容积 Loading Capacity	锅体材质 Pot Material	加热方式 Heating Source	使用压力 Working Pressure	设计压力 Design Pressure	真空泵 Vacuum Pump Power	电压 Voltage
100L-1000L	不锈钢 304/316 Stainless 304/316	蒸汽 (电导热油、电磁均可) Steam/Electric thermal-oil/ Electric induction	0.3Mpa	0.35Mpa	3.5kw-7.5kw	220V-480V

MIXING POT

搅拌罐



蒸汽搅拌罐 Steam heating



电磁反应釜 Electric induction heating



电导热油搅拌罐 Electric thermal-oil heating



斜搅拌锅 Inclined mixing type



CUSTOMIZED MACHINES

定制机型


















SHOWROOM PRESENTATION

展厅风采





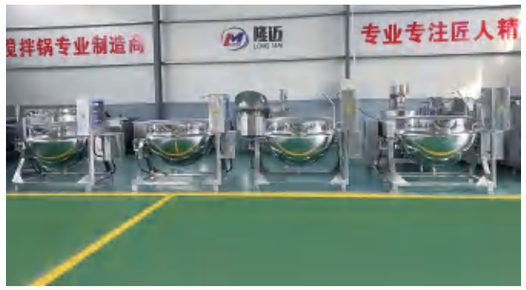

EXHIBITION PARTICIPATION

展会图片














合作伙伴

COOPERATIVE PARTNERS (PARTIAL)

DL 胖东来 | Sinopec 胜利油田 | 莫小仙 | 鲁花 中国味 鲁花香

新希望六和 NEW HOPE LIUHE | yurun 雨润 | 黄老五 | 统一

小洋人 XIAOYANGREN | 誉球食品 | 对对猴 Dui Dui Monkey | 鼎福

米村拌饭 朝鲜族非遗 | GOOD LUCK 菇的辣克 | 乌江榨菜 | 稻香村 SINCE1773 DE RICE CHOICE

久久丫 | 恋上阿麦 | 螺状元 | Miju 米佳元

恒都牛肉 HONDO BEEF 好牛肉 选恒都 | 瑞可莱 Ruikelai | 聚利堂 | 小东北

徽园枣花香 | 五亭 | 山东鑫旺调味食品有限公司 | 大自然农业

得利斯 Delisi 品质寄于一切 | 的的 | 和府捞面 | 聚名湘

雅客 yake | 百鳳庭 | 盖世 gaishi | 喜家德

鲍德鱼叔 | 鑫花溪 | GTMS 甘棠明善 | 贵三红 贵州省名牌产品

锅圈食汇 | 耕盛堂 GENGSHENG TANG | 禹王生态 YUWANG ECO. | 山水核桃

佳士博 JUSAPOR | 康師傅 | BHG 蓝海集团 BLUE HORIZON GROUP | 老娘舅

【鸿兴源】 | 历享央厨 | 盛記 SHING KEE | 西大市

中洋鱼天下 好鱼·好味·好生活 | 港荣 Kong WENG | 香海里 XIANGYUANLI | 清美 Tramy